

Natural flue draft gas fired storage water heater



Product details

TX600



ErP Ready



Low Emissions



Methane


Code **TX600**

Price **€ 5.250,00**

Propane

Code **TX600P**



Price **€ 5.280,00**

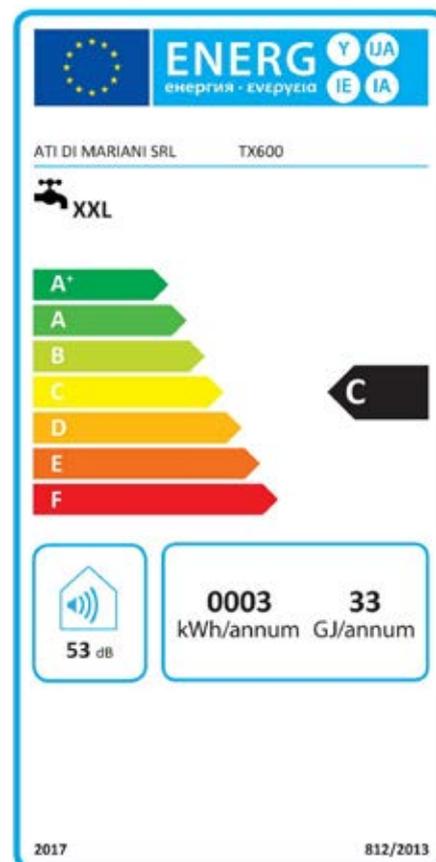

Main characteristics

- Internal glazing
- Closed-cell polyurethane foam insulation
- Electronic ignition
- Corrosion protection with magnesium anode
- Adjustable thermostat and overheat safety thermostat
- Stainless steel multigas burner, natural gas or propane ready
- Flue gas safety thermostat
- Overpressure safety valve
- Inspection and cleaning flange

Technical data		
Storage capacity	L	580
Nominal input (gross)	kW	27,00
Nominal output (net)	kW	23,63
Warm up time ($\Delta T = 45^{\circ}\text{C}$)	min	77
Continuous water at 40°C	l/h	813
Draw-off capacity single withdrawal*	L	1160
Methane consumption (G20)**	m ³ /h	2,80
Propane consumption (G31)**	kg/h	2,10
Max operating pressure	bar	6
Net weight	kg	246
Connections		
Cold Water Inlet	F	G 1" 1/4
Hot Water Outlet	C	G 1" 1/4
Recirculation	R	G 1" 1/4
Gas Inlet	G	G 1/2"
Exhaust fumes - concentric	S	/
Exhaust fumes - split		$\varnothing 186$
Packaging		
Packages	n.	2
Wooden cage (l x w x h) - (weight)	cm - (kg)	98x98x180 - (285)
Box (l x w x h) - (weight)	cm - (kg)	68x68x250 - (6)

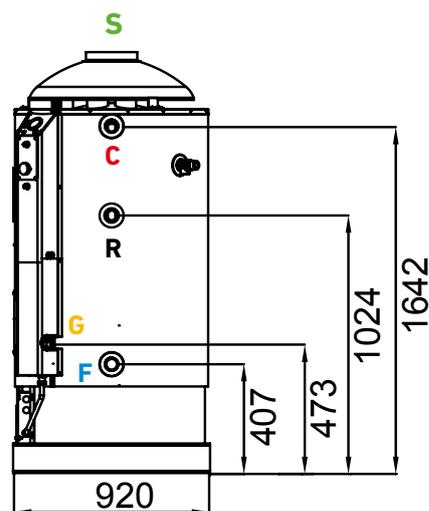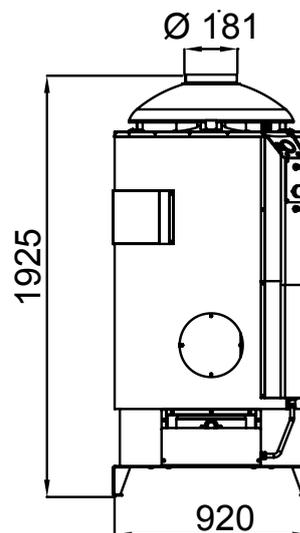

*Under standard conditions: T in 15°C , T out 40°C , T storage 65°C

** Under standard conditions: T in 15°C , 1013 mbar